



EtherNet/IP Field Network Controllers

PCON-C/CG ACON-C/CG

PCON/ACONs are now available in EtherNet/IP-ready versions. International Standard Network allows high-speed communication with its peripheral devices.

Features

1

High-speed and high-volume communication

Allows 100Mbps high-speed communication, and the communication cycle can be set to each communication group. By setting an appropriate communication cycle to each communication group, high-speed mass transfer is attained.

2

Easy connection with peripherals

EtherNet/IP is a global open field network. It is specified by the ISO/IEC 61158 series and is incorporated by numerous manufactures. With EtherNet/IP, IAI product can communicate with many peripheral devices.

3

Wire-saving

EtherNet/IP controllers input and output data to/from the master via an Ethernet cable. This not only reduces the number of wires, but also prevents mis-wiring and achieves greater ease of maintenance.

4

Operate by Remote I/O mode (position table movements) or through Direct Control

When operating an actuator you can choose to communicate with the controller in a mode most suited for the application. Remote I/O mode allows the selection of movements that have been predefined (varying positions, speeds, and other conditions) in the controller's position data table, whereas with Direct Control, these values may be specified directly to controller from the host.

EtherNet/IP is registered trademark of ODVA.

Types

	PCON-C/CG	ACON-C/CG
Connectable actuator	RCP2 series/RCP3 series	RCA series/RCA2 series/RCL series

Model Items


Series	Type	Motor type	Encoder type	I/O type	I/O cable length	Power voltage
PCON						
C	Positioner type					
CG	Conforming to safety category compatible type					
		20P 20 square pulse motor compatible 35P 35 square pulse motor compatible	I Incremental 28P 28 square pulse motor compatible 42P 42 square pulse motor compatible	EP EtherNet/IP	0 No cable 28SP 28 square pulse motor compatible (*) 56P 56 square pulse motor compatible	0 DC24V

* If a RCP2-RA3C/RGD3C is to be connected, specify 28SP for the motor type.

Series	Type	Motor type	Encoder type	I/O type	I/O cable length	Power voltage
ACON						
C	Positioner type					
CG	Conforming to safety category compatible type					
		2 2W motor 20S 20W motor (*)	I Incremental 5 5W motor 20 20W motor	EP EtherNet/IP	0 No cable 10 10W motor 30 30W motor	0 DC24V

* If a RCA-RA3□/RGS3□/RGD3□ or RCA2-SA4□/TA5□ is to be connected, specify 20S for the motor type.

System Configuration (Connection Example)

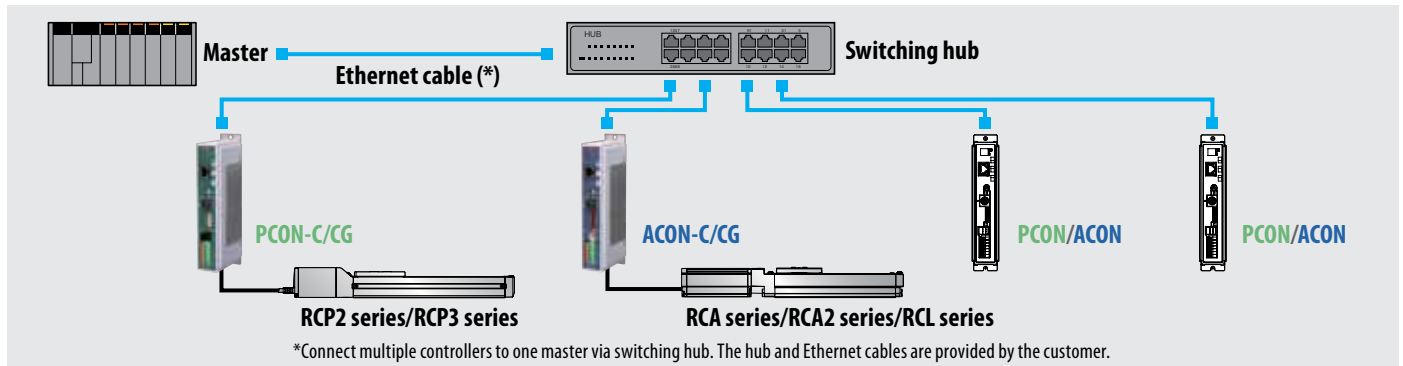

EtherNet/IP Communication Specifications


Item	Specification
Communication protocol	Dedicated EtherNet/IP protocol (Note 3)
Communication speed (Note 1)	10BASE-T/100BASE-T (Auto-negotiation setting is recommended)
Communication period	Automatically set according to the master
Communication cable length	Not to exceed 100 m between the hub and each node
Settable node addresses	0.0.0.0~255.255.255.255 (Set 192.168.0.1 at shipment)
Communication cable	Straight cable of category 5e or above (Double-shield cable braided with aluminum tape is recommended)
Connectors	RJ45 connector x 1
Connection hub (Note 2)	Switching hub

(Note 1) Make sure the link setting of the EtherNet/IP unit matches the communication mode set for the connected switching hub. If not, the link becomes unstable and communication cannot be performed properly. It is recommended to enable auto negotiation to set the baud rate for ACON and PCON. For farther detail on communication setting, please refer to the EtherNet/IP manual.

(Note 2) Build your network using a switching hub, without using a repeater hub. If a repeater hub is used, tag data link operation may become unstable. For details, refer to the operation manual for your master unit.

(Note 3) PCON/ACON Ethernet-IP products are compatible with CIP IMPLICIT messaging only (Remote I/O mode) and not CIP EXPLICIT messaging (Messaging mode). Therefore, our products are compatible with Allen Bradley Logix controllers (ControlLogix, CompactLogix, SoftLogix) based upon RSLogix5000 only. Our products are not compatible with AB legacy products (MicroLogix, SLC500, Pico, or PLC5) based on RS500 or other operating systems.

External Dimensions – PCON-C/CG, ACON-C/CG

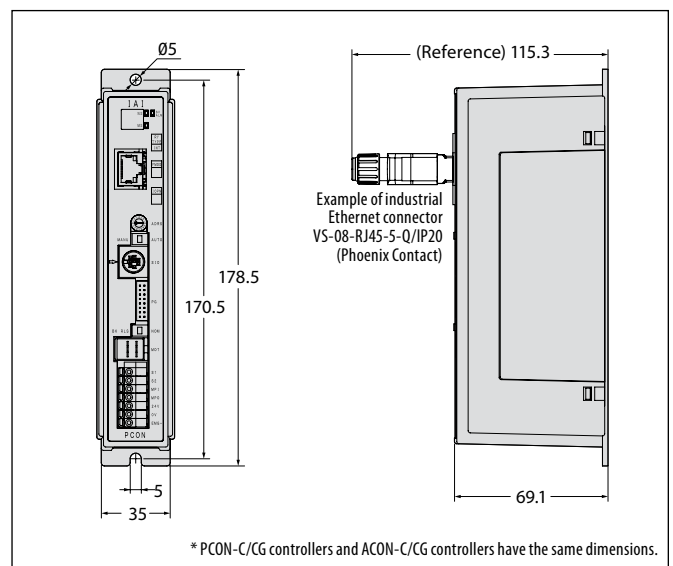

The versions of teaching tools supporting EtherNet/IP are listed below:

- PC software: V8.02.00.00 or later
- CON-PT/PD/PG: V1.20 or later
- CON-T/TG: V1.10 or later
- RCM-E/P: V2.20 or later

*If you are using any of these teaching tools of an earlier version, please contact IAI.

IAI America, Inc.

Headquarters: 2690 W. 237th Street, Torrance, CA 90505 (800) 736-1712

Chicago Office: 1261 Hamilton Parkway, Itasca, IL 60143 (800) 944-0333

Atlanta Office: 1220 Kennestone Circle, Suite 108, Marietta, GA 30066 (888) 354-9470

The information contained in this product brochure may change without prior notice due to product improvements.

IAI Industrieroboter GmbH

Ober der Roth 4, D-65824 Schwalbach am Taunus, Germany

www.intelligentactuator.com

